


HUNSN BY02 Install demo layout

Installation instructions

Install or Upgrading memory modules

1. Turn off your Mini PC then disconnect all cables and peripherals.
2. Place the Mini PC on a flat stable surface, with its top side facing down.
3. Using flat-head screwdriver or straightened paper clip to remove the rubber feet from the bottom side then set them aside.

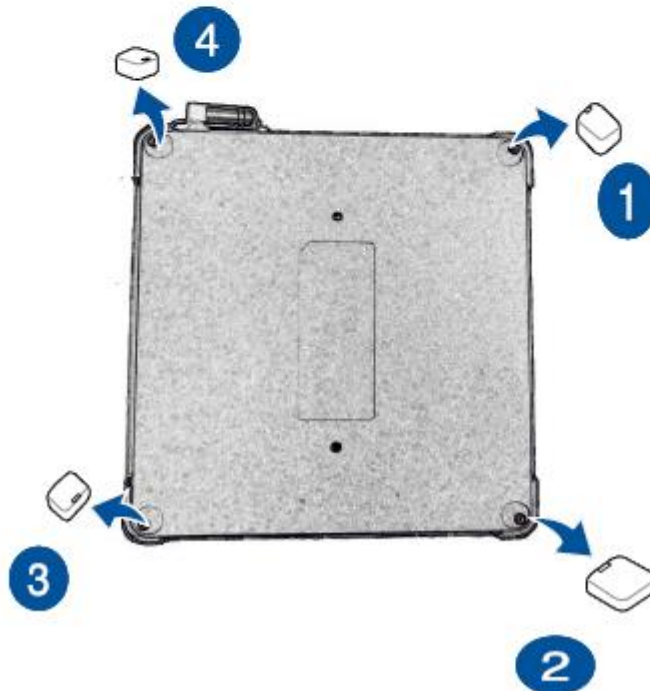

4. Remove the four screws securing the cover.

Bottom Side:




Top Side:




5. Align and insert the memory module into the slot (A) and press it down (B) until it is securely seated in place. Repeat the same steps to install the other memory module.

Bottom Side Memory Slot:

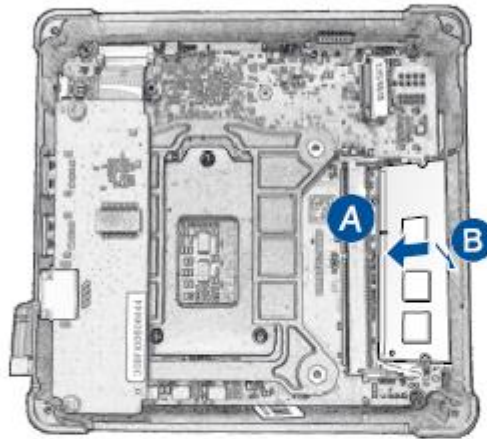


Top Side Memory Slot:

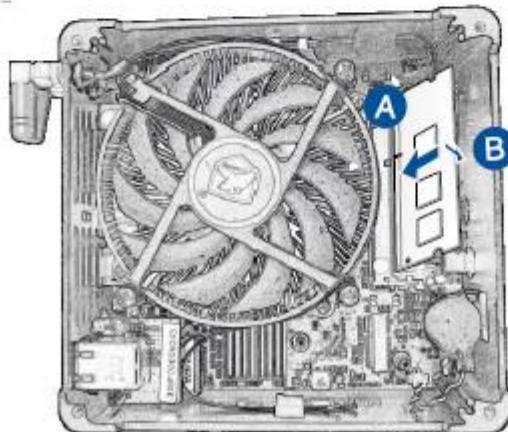

Install or Upgrading WIFI modules


Align and insert the wifi module into the slot (A) and press it down (B) then attached the screw to secure the wifi module

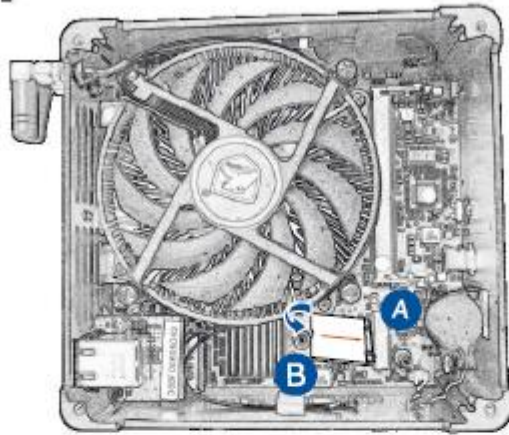


Install or Upgrading SSD modules

Align and insert the SSD module into the slot (A) and press it down (B) then attached the screw to secure the SSD module
Repeat the same steps to install the other SSD module.

Bottom side SSD connector:

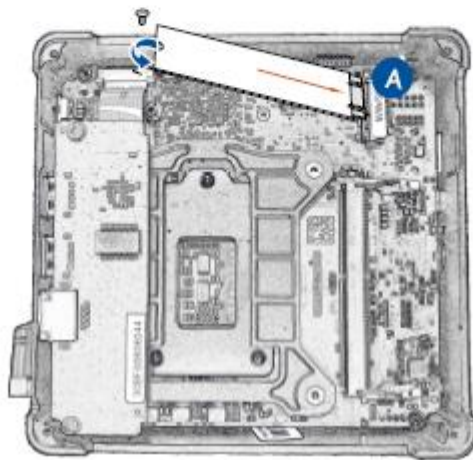


Top side SSD connector:

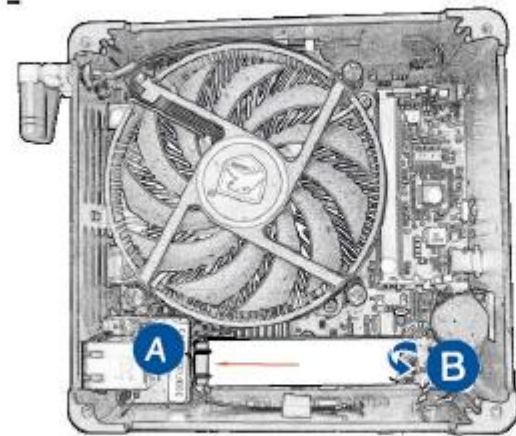

Install or **Upgrading** SSD/HDD disk **modules**


- 1 Align and insert the Connector A module into the SSD/HDD disk.
- 2 Then attached the screws to secure the SSD/HDD dish into the bottom cover.

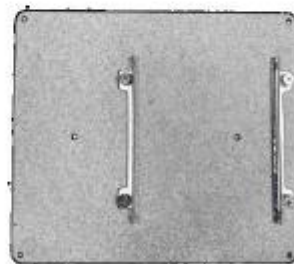

attach the screws to secure the disk:



- 3). Align the connector A on the bottom cover side with the PIN on the mainboard, then closed the bottom cover.

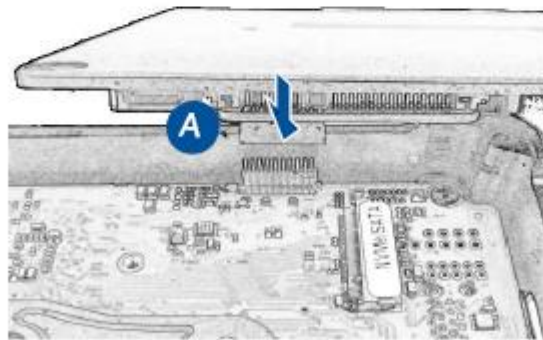

- 4). Attach the four screws to securing the bottom cover. and replace them with rubber feet.